




M 1:25



**PRIJE BETONIRANJA OBAVEZNO UGRADITI
ARMATURU PRIKAZANU NACRTIMA
TEMELJNIH GREDA !!!**



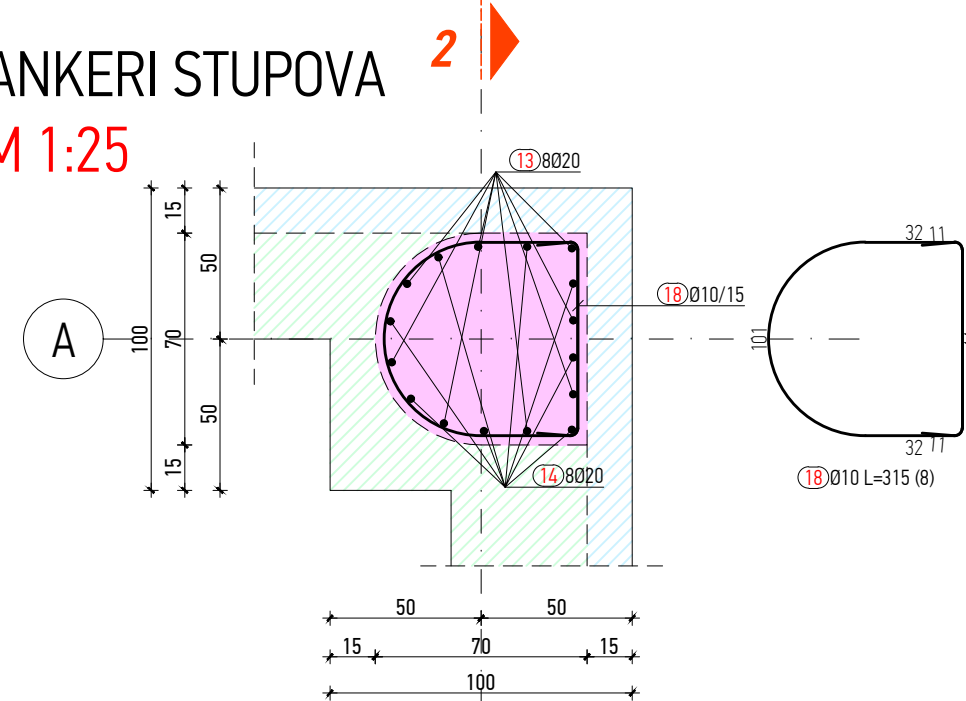
M 1:25










M 1:25



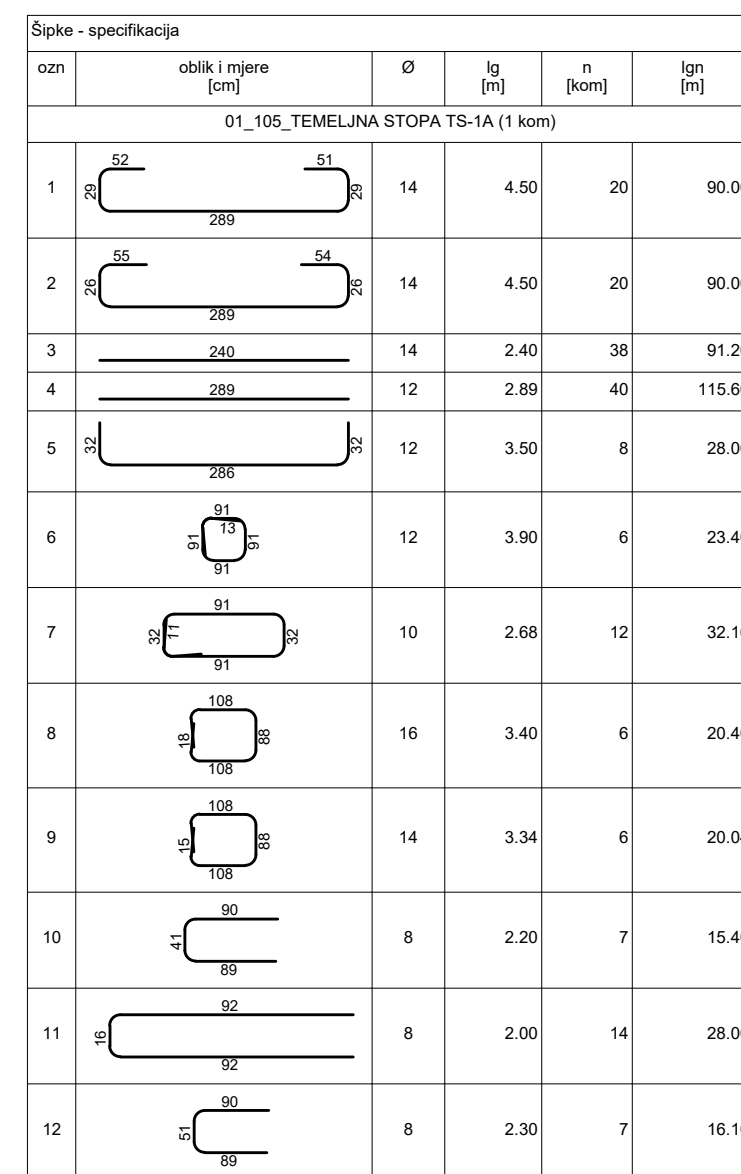M 1:500



13		20	3.00	8	24.00
14		20	4.50	8	36.00
15		8	1.20	13	15.60
16		10	1.28	15	19.20
17		10	1.34	7	9.38
18		10	3.15	8	25.20
19		14	1.06	36	38.16

Šipke - rekapitulacija			
Ø [mm]	Ign [m]	Jedinična težina [kg/m ³]	Težina [kg]
B500			
8	75.10	0.41	30.42
10	85.94	0.63	54.40
12	167.00	0.91	152.14
14	329.40	1.24	409.11
16	20.40	1.62	33.07
20	60.00	2.54	152.16
Ukupno (B500)			831.38
Ukupno			831.38

GRADIVO:
BETON: C25/30, XC2
ARMATURA:
ŠIPKE: B500B
debljina zaštitnog sloja:
TEMELJNA STOPA
 $C_{nom} = C_{min} + \Delta C_{dev}$
 $C_{nom} = 4,0 + 1,0$
 $C_{nom} = 5,0$ cm
NADTEMELJ
 $C_{nom} = C_{min} + \Delta C_{dev}$
 $C_{nom} = 3,0 + 1,0$
 $C_{nom} = 4,0$ cm

