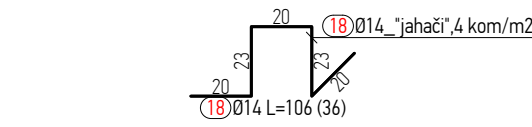




M 1:25



**PRIJE BETONIRANJA OBAVEZNO UGRADITI
ARMATURU PRIKAZANU NACRTIMA
TEMELJNIH GREDA !!!**



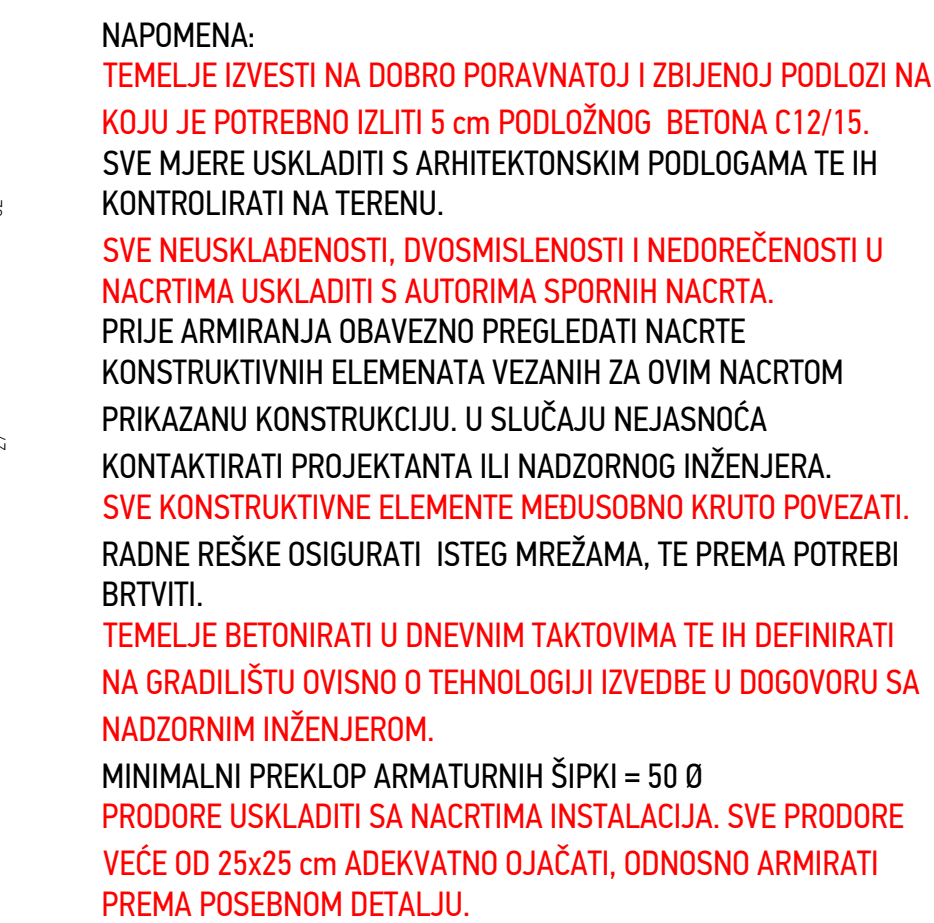
M 1:25








M 1:25



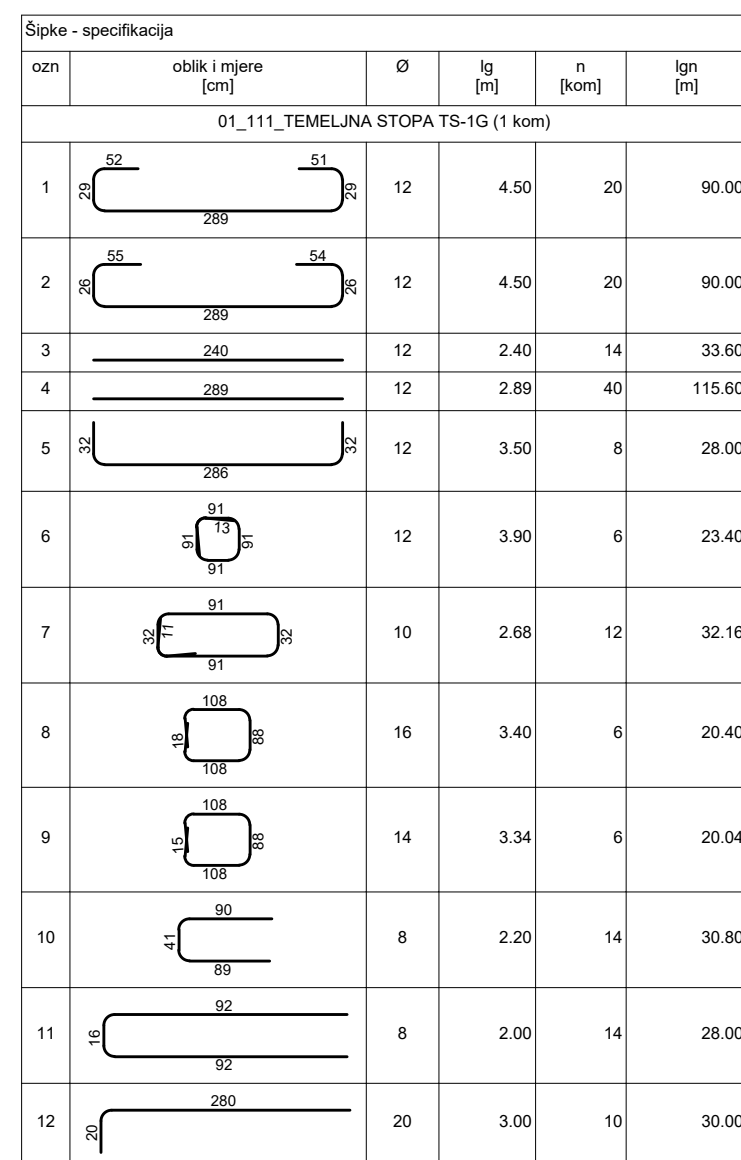M 1:500



13		20	4.50	10	45.00
14		10	3.15	8	25.20
15		8	1.20	14	16.80
16		10	1.28	15	19.20
17		10	1.34	7	9.38
18		14	1.06	36	38.16

Šipke - rekapitulacija				
Ø [mm]	lg [m]	Jedinična težina [kg/m]	Težina [kg]	
B500				
8	75,60	0,41	30,62	
10	85,94	0,63	54,45	
12	380,60	0,91	346,73	
14	58,20	1,24	72,28	
16	20,40	1,62	33,07	
20	75,00	2,54	190,20	
Ukupno (B500)			727,35	
Ukupno			727,35	

GRADIVO:
BETON: C25/30, XC2
ARMATURA:
ŠIPKE: B500B
debljina zaštitnog sloja:
TEMELJNA STOPA
 $C_{nom}=C_{min} + \Delta C_{dev}$
 $C_{nom}=4,0 + 1,0$
 $C_{nom}=5,0$ cm
NADTEMELJ
 $C_{nom}=C_{min} + \Delta C_{dev}$
 $C_{nom}=3,0 + 1,0$
 $C_{nom}=4,0$ cm

